(51) International Patent Classification 7 :		(11) International Publication Number:	WO 00/67469
H04N 5/00, 7/26	A1	(43) International Publication Date:	9 November 2000 (09.11.00)

(54) Title: DATA TRANSMISSION

(57) Abstract

A data transmission system (10) is provided for transmit-
ting a data signal between a server (12, 14, 16, 18) and a com-
munications terminal (20, 22) over a transmission link having
a variable bandwidth. The data signal is a scalable compressed
multimedia clip comprising a sequence of images. Each image
has a base layer and a number of enhancement layers. To cope
with variability in the bandwidth, the sequence is re–ordered so
that the base layers have greater safety times than the enhance-
ment layers. This allows all of the base layers to arrive in time
to be played at the expense of the enhancement layers.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

DATA TRANSMISSION

This invention relates to data transmission and is particularly, but not exclusively, related to transmission of data representative of picture sequences, such as video.

5 It is particularly suited to transmission over links susceptible to errors and loss of data.

During the past few years, the amount of multimedia content available through the Internet has increased considerably. Since data delivery rates to mobile terminals

10 are becoming high enough to enable such terminals to be able to retrieve multimedia content, it is becoming desirable to enable mobile terminals to retrieve video and other multimedia content from the Internet. An example of a high-speed data delivery system is the upcoming GSM phase 2+.

15 The term multimedia as used herein applies to both sound and pictures, to sound only and to pictures only. Sound may include speech and music.

Network traffic through the Internet is based on a transport protocol called the Internet Protocol (IP). IP is concerned with transporting data packets from one

20 location to another. It facilitates the routing of packets through intermediate gateways, that is, it allows data to be sent to machines that are not directly connected in the same physical network. The unit of data transported by the IP layer is called an IP datagram. The delivery service offered by IP is connectionless, that is IP datagrams are routed around the Internet independently

25 of each other. Since no resources are permanently committed within the gateways to any particular connection, the gateways may occasionally have to discard datagrams because of lack of buffer space or other resources. Thus, the delivery service offered by IP is a best effort service rather than a guaranteed service.

30 Internet multimedia is typically streamed over the User Datagram Protocol (UDP), the Transmission Control Protocol (TCP) or the Hypertext Transfer Protocol (HTTP).

UDP is a connectionless lightweight transport protocol. It offers very little above the service offered by IP. Its most important function is to deliver datagrams between specific transport endpoints. Consequently, the transmitting application has to take care of how to packetize data to datagrams. Headers used in UDP contain a checksum that allows the UDP layer at the receiving end to check the validity of the data. Otherwise, degradation of IP datagrams will in turn affect UDP datagrams. UDP does not check that the datagrams have been received, does not retransmit missing datagrams, nor does it guarantee that the datagrams are received in the same order as they were transmitted.

UDP introduces a relatively stable throughput having a small delay since there are no retransmissions. Therefore it is used in retrieval applications to deal with the effect of network congestion and to reduce delay (and jitter) at the receiving end. However, the client must be able to recover from packet losses and possibly conceal lost content. Even with reconstruction and concealment, the quality of a reconstructed clip suffers somewhat. On the other hand, playback of the clip is likely to happen in real-time without annoying pauses. Firewalls, whether in a company or elsewhere, may forbid the usage of UDP because it is connectionless.

TCP is a connection-orientated transport protocol and the application using it can transmit or receive a series of bytes with no apparent boundaries as in UDP. The TCP layer divides the byte stream into packets, sends the packets over an IP network and ensures that the packets are error-free and received in their correct order. The basic idea of how TCP works is as follows. Each time TCP sends a packet of data, it starts a timer. When the receiving end gets the packet, it immediately sends an acknowledgement back to the sender. When the sender receives the acknowledgement, it knows all is well, and cancels the timer. However, if the IP layer loses the outgoing segment or the return acknowledgement, the timer at the sending end will expire. At this point, the sender will retransmit the segment. Now, if the sender waited for an acknowledgement for each packet before sending the next one, the overall

transmission time would be relatively long and dependent on the round-trip delay between the sender and the receiver. To overcome this problem, TCP uses a sliding window protocol that allows several unacknowledged packets to be present in the network. In this protocol, an acknowledgement packet contains a field filled

5   with the number of bytes the client is willing to accept (beyond the ones that are currently acknowledged). This window size field indicates the amount of buffer space available at the client for storage of incoming data. The sender may transmit data within the limit indicated by the latest received window size field. The sliding window protocol means that TCP effectively has a slow start mechanism. At the

10   beginning of a connection, the very first packet has to be acknowledged before the sender can send the next one. Typically, the client then increases the window size exponentially. However, if there is congestion in the network, the window size is decreased (in order to avoid congestion and to avoid receive buffer overflow). The details how the window size is changed depend on the particular TCP

15   implementation in use.

A multimedia content creation and retrieval system is shown in Figure 1. The system has one or more media sources, for example a camera and a microphone. Alternatively, multimedia content can also be synthetically created without a

20   natural media source, for example animated computer graphics and digitally generated music. In order to compose a multimedia clip consisting of different media types, such as video, audio, text, images, graphics and animation, raw data captured from the sources are edited by an editor. Typically the storage space taken up by raw (uncompressed) multimedia data is huge. It can be megabytes for

25   a video sequence which can include a mixture of different media, for example animation. In order to provide an attractive multimedia retrieval service over low bit rate channels, for example 28.8 kbps and 56 kbps, multimedia clips are compressed in the editing phase. This typically occurs off-line. The clips are then handed to a multimedia server. Typically, a number of clients can access the

30   server over one or more networks. The server is able to respond to the requests presented by the clients. The main task of the server is to transmit a desired multimedia clip to the client which the client decompresses and plays. During

4

playback, the client utilizes one or more output devices, such as a screen and a loudspeaker. In some circumstances, clients are able to start playback while data are still being downloaded.

5   It is convenient to deliver a clip by using a single channel which provides a similar quality of service for the entire clip. Alternatively different channels can be used to deliver different parts of a clip, for example sound on one channel and pictures on another. Different channels may provide different qualities of service. In this context, quality of service includes bit rate, loss or bit error rate and transmission

10   delay variation.

In order to ensure multimedia content of a sufficient quality is delivered, it is provided over a reliable network connection, such as TCP, which ensures that received data are error-free and in the correct order. Lost or corrupted protocol

15   data units are retransmitted. Consequently, the channel throughput can vary significantly. This can even cause pauses in the playback of a multimedia stream whilst lost or corrupted data are retransmitted. Pauses in multimedia playback are annoying.

20   Sometimes retransmission of lost data is not handled by the transport protocol but rather by some higher-level protocol. Such a protocol can select the most vital lost parts of a multimedia stream and request the retransmission of those. The most vital parts can be used for prediction of other parts of the stream, for example.

25   In order to understand the invention better, descriptions of the elements of the retrieval system, namely the editor, the server and the client, are set out below.

A typical sequence of operations carried out by the multimedia clip editor is shown in Figure 2. Raw data are captured from one or more data sources. Capturing is

30   done using hardware, device drivers dedicated to the hardware and a capturing application which controls the device drivers to use the hardware. Capturing hardware may consist of a video camera connected to a PC video grabber card,

●

●

for example. The output of the capturing phase is usually either uncompressed data or slightly compressed data with irrelevant quality degradations when compared to uncompressed data. For example, the output of a video grabber card could be in an uncompressed YUV 4:2:0 format or in a motion-JPEG format.

5   The YUV colour model and the possible sub-sampling schemes are defined in Recommendation ITU-R BT.601-5 "Studio Encoding Parameters of Digital Television for Standard 4:3 and Wide-Screen 16:9 Aspect Ratios". Relevant digital picture formats such as CIF, QCIF and SQCIF are defined in Recommendation ITU-T H.261 "Video Codec for Audiovisual Services at p x 64 kbits" (section 3.1

10   "Source Formats").

During editing separate media tracks are tied together in a single timeline. It is also possible to edit the media tracks in various ways, for example to reduce the video frame rate. Each media track may be compressed. For example, the

15   uncompressed YUV 4:2:0 video track could be compressed using ITU-T recommendation H.263 for low bit rate video coding. If the compressed media tracks are multiplexed, they are interleaved so that they form a single bitstream. This clip is then handed to the multimedia server. Multiplexing is not essential to provide a bitstream. For example, different media components such as sounds

20   and images may be identified with packet header information in the transport layer. Different UDP port numbers can be used for different media components.

A typical sequence of operations carried out by the multimedia server is shown in Figure 3. Typically multimedia servers have two modes of operation; they deliver

25   either pre-stored multimedia clips or a live (real-time) multimedia stream. In the first mode, clips are stored in a server database, which is then accessed on-demand by the server. In the second mode, multimedia clips are handed to the server as a continuous media stream that is immediately transmitted to clients. Clients control the operation of the server by an appropriate control protocol being

30   at least able to select a desired media clip. In addition, servers may support more advanced controls. For example, clients may be able to stop the transmission of a clip, to pause and resume transmission of a clip, and to control the media flow in

●   ●

case of a varying throughput of the transmission channel in which case the server must dynamically adjust the bitstream to fit into the available bandwidth.

5   A typical sequence of operations carried out by the multimedia retrieval client is shown in Figure 4. The client gets a compressed and multiplexed media clip from a multimedia server. The client demultiplexes the clip in order to obtain separate media tracks. These media tracks are then decompressed to provide reconstructed media tracks which are played out with output devices. In addition to these operations, a controller unit is provided to interface with end-users, that is to 10   control playback according to end-user input and to handle client-server control traffic. It should be noted that the demultiplexing-decompression-playback chain can be done on a first part of the clip while still downloading a subsequent part of the clip. This is commonly referred to as streaming. An alternative to streaming is to download the whole clip to the client and then demultiplex it, decompress it and 15   play it.

A typical approach to the problem of varying throughput of a channel is to buffer media data in the client before starting the playback and/or to adjust the transmitted bit rate in real-time according to channel throughput statistics.

20

One way of tackling the problem of pauses is by using dynamic bit rate adjustment in the multimedia server. However, the server may not react to network congestion sufficiently quickly to avoid pausing in the client. In addition, the server cannot control the retransmission mechanism of TCP (or other underlying protocols, such 25   as IP).

Even if dynamic bit rate adjustment is used, the client has to do some initial buffering in any case to avoid delivery delays caused by re-transmission. If a constant channel bit rate is assumed, one can calculate the point in time at which 30   a data unit is supposed to have been completely received. In addition, one can calculate the point in time by which a data unit is supposed to have been played. The time difference between these two points in time is referred to as the safety

time. Another way of defining the safety time is to state that it is the maximum time between two consecutively received data units which does not cause pausing in the playback.

5   When calculating the safety times for a clip, each data unit has to be considered separately. The calculations assume that no throughput drops occur before the data unit that is currently being processed. If the maximum throughput of the channel is equal to the average bit rate of the multimedia clip, the client cannot recover from a drop in the amount of received bits after throughput has dropped.
10   The only way to guarantee some protection against throughput drops is to buffer some data before starting playback. If the channel stops providing data, the client can still play the stream while there are data in a buffer. Thus, the average safety time is approximately equal to the initial buffering time. Since the bit rate of the clip may vary, the safety time also may vary and the minimum safety time is thus equal
15   to or less than the initial buffering delay.

HTTP, the Hypertext Transfer Protocol, is the basis of the World Wide Web (WWW). It is a simple protocol. A client establishes a TCP connection to a server, issues a request, and reads back the server's response. The server denotes the
20   end of its response by closing the connection. The arrangement of protocol layers is typically HTTP on TCP which is on IP.

The most common HTTP request is called GET. The GET request is associated with a universal resource identifier (URI) which uniquely specifies the requested
25   item. The server responds to the GET request by returning the file corresponding to the specified URI. The file returned by the server normally contains pointers (hypertext links) to other files that can reside on other servers. A user can therefore easily follow the links from file to file.

30   Servers used for Internet multimedia retrieval are either dedicated multimedia servers or normal WWW servers.

Dedicated multimedia servers are typically capable of transmission over HTTP, TCP and UDP protocols. They may be able to readjust the contents of media clips dynamically to meet the available network bandwidth and to avoid network congestion. They may also support fast forward and fast rewind operations as well

5 as live multimedia streaming. They can provide a number of streams simultaneously.

Multimedia servers based on normal WWW servers are also referred to as server-less or HTTP multimedia solutions. The multimedia clips are streamed over HTTP.

10 Since this type of server has no control over the contents of the stream, no flow (bandwidth) control can be applied, and it cannot respond to network congestion. Therefore, sudden pauses in the playback can occur. Consequently there must be a relatively long initial buffering delay in the client before starting the playback to avoid such sudden pauses. Fast-forwarding a multimedia stream from a standard

15 WWW server is not possible. Live multimedia streaming must be implemented using special tricks, such as Java programming.

When a streamed multimedia clip is received, a suitable independent media player application or a browser plug-in can be used to play it. Such multimedia players

20 differ largely from browser to browser. Newer browsers may have some integrated plug-ins for the most popular streaming video players.

There are a number of different data transmission methods available for transmitting data between mobile terminals and their networks. One of the best

25 known methods is GSM (Global System for Mobile communications).

The current GSM data service called Circuit Switched Data (CSD) offers a 9.6 kbps circuit-switched channel. It is intended for GSM to provide a 14.4 kbps data channel having forward error correction (FEC) and status information. High Speed

30 Circuit Switched Data (HSCSD) provides multiple 9.6 kbps or 14.4 kbps time slots for a single user at the same time. There are symmetric and asymmetric connections. In a symmetric connection, the air interface resources are allocated

9

symmetrically, and provide the same data transmission rate in both directions. In an asymmetric connection, different data rates are supported for up-link and for down-link. However, asymmetric air interface connections are applicable only in non-transparent mode (see below).

5

Circuit-switched GSM data systems, CSD and HSCSD, offer two basic connection types, namely transparent (T) and non-transparent (NT). These are distinguished by the way they correct transmission errors. In a transparent connection, error correction is done solely by a forward error correction mechanism provided by the

10 radio interface transmission scheme. The connection is considered as a synchronous circuit. The available throughput is constant, and the transmission delay is fixed. The transmitted data are likely to contain bit inversion errors. In a non-transparent connection, the GSM circuit connection is regarded as a packet (or frame) data flow although the end-to-end service is circuit-switched. Each

15 frame includes redundancy bits to enable a receiver to detect remaining errors. There are two sources of error, packet drops and corruption due to interference in the radio frequency path. The latter can be recovered by redundancy checking. The Radio Link Protocol (RLP) is used to provide retransmission in case of remaining errors in frame. If a frame is found to be correct, the receiver

20 acknowledges this fact. If it is found not to be correct, a negative acknowledgement is sent and the indicated frame is retransmitted. Consequently, a non-transparent connection is error-free but throughput and transmission delay vary.

25 Other network types exist, for example GPRS (General Packet Radio System). In GPRS the transmissions are truly packet based.

A video sequence consists of a series of still pictures. Video compression methods are based on reducing redundant and perceptually irrelevant parts of video

30 sequences. The redundancy in video sequences can be categorised into spatial, temporal and spectral redundancy. Spatial redundancy means the correlation between neighbouring pixels. Temporal redundancy means that the same objects

appear in consecutive pictures. Reducing the temporal redundancy reduces the amount of data required to represent a particular image sequence and thus compresses the data. This can be achieved by generating motion compensation data, which describe the motion between the current and a previous (reference)

5   picture. In effect, the current picture is predicted from the previous one. Spectral redundancy means the correlation between the different colour components of the same picture.

Simply reducing the redundancy of the sequence does not usually compress it

10   enough. Therefore, some video encoders try to reduce the quality of those parts of a video sequence which are subjectively the least important. In addition, the redundancy of the encoded bitstream is reduced by means of efficient lossless coding of compression parameters and coefficients. The main technique is to use variable length codes.

15

Video compression methods typically differentiate between pictures that can use temporal redundancy reduction and those that cannot. Compressed pictures, which do not use temporal redundancy reduction methods, are usually called INTRA or I-frames whereas temporally predicted pictures are called INTER or P-

20   frames. In the INTER frame case, the predicted (motion-compensated) picture is rarely precise enough, and therefore a spatially compressed prediction error picture is also associated with each INTER frame.

Temporal scalability provides a mechanism for enhancing perceptual quality by

25   increasing the picture display rate. This is achieved by taking a pair of consecutive reference pictures and bi-directionally predicting a B-picture from either one or both of them. The B-picture can then be played in sequence between the two anchor pictures. This is illustrated in Figure 5. Bi-directional temporal prediction yields a more accurately predicted picture than uni-directional prediction. Thus, for

30   the same quantization level, B-pictures yield increased compression as compared to forwardly predicted P-pictures. B-pictures are not used as reference pictures, that is other pictures are never predicted from them. Since they can be discarded

11

without impacting the picture quality of future pictures, they provide temporal scalability. It should be noted that while B-pictures provide better compression performance than P-pictures, they are more complex to construct and require more memory. Furthermore they introduce additional delays because bi-directional

5   interpolation requires both reference pictures to have been received and additional calculations are required. In addition, B-pictures require more side information in the bitstream.

The term scalability refers to the capability of a compressed sequence to be

10   decoded at different data rates. In other words, a scalable multimedia clip can be edited relatively easily while it is compressed so that it can be streamed over channels with different bandwidths and still be decoded and played back in real-time.

15   Scalable multimedia is typically ordered so that there are hierarchical layers of data. A base layer contains a basic representation of the multimedia clip whereas enhancement layers contain refinement data on top of underlying layers. Consequently, the enhancement layers improve the quality of the clip.

20   Scalability is a desirable property for heterogeneous and error prone environments. This property is desirable in order to counter limitations such as constraints on bit rate, display resolution, network throughput, and decoder complexity.

25   Scalability can be used to improve error resilience in a transport system where layered coding is combined with transport prioritisation. The term transport prioritisation here refers to various mechanisms to provide different qualities of service in transport, including unequal error protection, to provide different channels having different error/loss rates. Depending on their nature, data are

30   assigned differently, for example, the base layer may be delivered through a channel with high degree of error protection, and the enhancement layers may be transmitted through more error-prone channels.

Generally, scalable multimedia coding suffers from a worse compression efficiency than non-scalable coding. In other words, a multimedia clip coded as a scalable multimedia clip with all enhancement layers requires greater bandwidth than if it 5 had been coded as a non-scalable single-layer clip with equal quality. However, exceptions to this general rule exist, for example the temporally scalable B-frames in video compression.

In the following, scalability is discussed with reference to the ITU-T H.263 video 10 compression standard. H.263 is an ITU-T recommendation for video coding in low bit rate communication which generally means data rates below 64 kbps. The recommendation specifies the bitstream syntax and the decoding of the bitstream. Currently, there are two versions of H.263. Version 1 consists of the core algorithm and four optional coding modes. H.263 version 2 is an extension of version 1 15 providing twelve new negotiable coding modes.

Pictures are coded as luminance and two colour difference (chrominance) components (Y, C_B and C_R). The chrominance pictures are sampled with a half of the pixels along the both co-ordinate axes when compared to the luminance 20 picture.

The scalability mode (Annex O) of H.263 specifies syntax to support temporal, signal-to noise ratio (SNR), and spatial scalability capabilities.

25 Spatial scalability and SNR scalability are closely related, the only difference being the increased spatial resolution provided by spatial scalability. An example of SNR scalable pictures is shown in Figure 6. SNR scalability implies the creation of multi-rate bit streams. It allows for the recovery of coding errors, or differences between an original picture and its reconstruction. This is achieved by using a finer 30 quantizer to encode the difference picture in an enhancement layer. This additional information increases the SNR of the overall reproduced picture.

●   ●

Spatial scalability allows for the creation of multi-resolution bit streams to meet varying display requirements and/or constraints. A spatially scalable structure is illustrated in Figure 7. It is essentially the same as in SNR scalability except that a spatial enhancement layer attempts to recover the coding loss between an up-

5   sampled version of the reconstructed reference layer picture and a higher resolution version of the original picture. For example, if the reference layer has a quarter common intermediate format (QCIF) resolution, and the enhancement layer has a common intermediate format (CIF) resolution, the reference layer picture must be scaled accordingly such that the enhancement layer picture can

10   be predicted from it. The QCIF standard allows the resolution to be increased by a factor of two in the vertical direction only, horizontal direction only, or both the vertical and horizontal directions for a single enhancement layer. There can be multiple enhancement layers, each increasing the picture resolution over that of the previous layer. The interpolation filters used to up-sample the reference layer

15   picture are explicitly defined in the H.263 standard. Aside from the up-sampling process from the reference to the enhancement layer, the processing and syntax of a spatially scaled picture are identical to those of an SNR scaled picture.

In either SNR or spatial scalability, the enhancement layer pictures are referred to

20   as EI- or EP-pictures. If the enhancement layer picture is upwardly predicted from a picture in the reference layer, then the enhancement layer picture is referred to as an Enhancement-I (EI) picture. In this type of scalability, the reference layer means the layer "below" the current enhancement layer. In some cases, when reference layer pictures are poorly predicted, over-coding of static parts of the

25   picture can occur in the enhancement layer, causing an unnecessarily excessive bit rate. To avoid this problem, forward prediction is permitted in the enhancement layer. A picture that can be predicted in the forward direction from a previous enhancement layer picture or, alternatively, upwardly predicted from the reference layer picture is referred to as an Enhancement-P (EP) picture. Note that computing

30   the average of the upwardly and forwardly predicted pictures can provide bi-directional prediction for EP-pictures. For both EI- and EP-pictures, upward prediction from the reference layer picture implies that no motion vectors are

required. In the case of forward prediction for EP-pictures, motion vectors are required.

5   In multi-point and broadcast multimedia applications, constraints on network throughput may not be foreseen at the time of encoding. Thus, a scalable bitstream should be used. Figure 8 shows an IP multicasting arrangement where each router can strip the bitstream according to its capabilities. It shows a server S providing a bitstream to a number of clients C. The bitstreams are routed to the clients by routers R. In this example, the server is providing a clip which can be

10   scaled to at least three bit rates, 120 kbit/s, 60 kbit/s and 28 kbit/s.

If the client and server are connected via a normal uni-cast connection, the server may try to adjust the bit rate of the transmitted multimedia clip according to the temporary channel throughput. One solution is to use a layered bit stream and to

15   adapt to bandwidth changes by varying the number of transmitted enhancement layers.

According to a first aspect of the invention there is provided a method of transmitting a data signal having a sequence of data units in a predetermined

20   order over a transmission link between a data source and a data sink comprising the step of sending the data units in an order determined by their relative importance rather than their predetermined order.

According to a second aspect of the invention there is provided a data

25   transmission system for transmitting a data signal having a sequence of data units in a predetermined order over a transmission link between a data source and a data sink the data units being sent in an order determined by their relative importance rather than their predetermined order.

30   According to a third aspect of the invention there is provided a server for transmitting a data signal having a sequence of data units in a predetermined

order over a transmission link the data units being sent in an order determined by their relative importance rather than their predetermined order.

Preferably the server comprises re-ordering means. Preferably the server
5   comprises an editor for providing a scalable data signal.

According to a fourth aspect of the invention there is provided a computer program product stored on a computer usable medium comprising computer readable program means for causing transmission of a data signal having a sequence of
10 data units in a predetermined order over a transmission link the data units being sent in an order determined by their relative importance rather than their predetermined order.

Preferably the computer program product comprises a server. In this sense it is
15 meant that the when the computer program is loaded into hardware it causes the hardware to operate as a server device. Preferably the computer program product comprises an editor for providing a scalable data signal. Preferably the computer program product comprises re-ordering means for re-ordering the data units.

20 According to a fifth aspect of the invention there is provided a data signal having a sequence of data units for transmission over a transmission link between a data source and a data sink the data units being in an order determined by their relative importance rather than their predetermined order.

25 Preferably where the data units or layers of the data units are ordered into a sequence other than their original sequence, the invention also includes means or a step for returning the data units or layers of the data units into their original sequence.

30 The transmission link may simply be a bottleneck where congestion is occurring and the invention is used to overcome the bottleneck.

16

An advantage of the invention is that it can provide larger safety times than prior art arrangements with the same initial buffering. In addition, it provides some degree of protection against decreased transmission throughput. Therefore it helps in reducing the occurrence of pauses without sacrificing compression

5   efficiency.

The invention also helps in transmitting over a unreliable network connection using transmission protocols which do not automatically retransmit but only retransmit those missing parts chosen by a higher level function, for example in response to

10   feedback. In this case, it provides more time for retransmission of the vital parts of a data signal than prior art arrangements. Thus, vital parts of a stream are more likely to be transmitted successfully and the ultimate end user of the data signal is likely to perceive a better output quality.

15   Preferably the bandwidth of the transmission link available to the data signal is variable. This may be because the amount of data traffic using the link is variable, for example due to the need to re-transmit lost or corrupted data.

The invention provides a way of altering a data signal so that it can be transmitted

20   over a transmission link having a bandwidth which would otherwise not be sufficient for it or for allowing certain of the bandwidth of its transmission link to be made available for other data, for example control information.

Preferably the effect of the invention is to increase the safety times of some data

25   units relative to, or even at the expense of, the safety times of other data units.

Preferably the data signal is arranged in a hierarchy having a base layer and at least one enhancement layer. The term base layer means a most fundamental layer. The base layer may represent the least refined version of the data signal. In

30   each unit, the (or each) enhancement layer, when combined with the base layer, refines the base layer to make it more like the data unit. Each enhancement layer

17

may add more refinement to the base layer. Preferably the safety time of the base layer is increased relative to the safety times of the enhancement layers.

Preferably the data signal is scalable. The base layer and the or each
5 enhancement layer may have a scaled relationship with respect to each other. The signal may be scalable in the temporal, the spatial, the spectral or the SNR domains.

Preferably by virtue of re-ordering the sequence the layers have safety times
10 which depend on their position in the hierarchy. For example the base layer of a particular data unit may have a greater safety time than enhancement layers. Advantageously, the finer the level of refinement represented by a layer, the shorter its safety time.

15 Preferably the source is a server. Alternatively it is an editor.

Preferably the sink is a client. It may be a destination of the data signal such as a mobile terminal, for example a mobile telephone.

20 Preferably the data units are frames. In one embodiment the data units represent a sequence of pictures. Conveniently it is a video sequence. Most preferably, it comprises multimedia data.

It should be understood that the terms "layer" and "layers" are being used
25 figuratively and refer to blocks of data which can be applied to each other rather than to a strictly positional relationship.

The invention will now be described by way of example only with reference to the accompanying drawings in which:
30 Figure 1 shows a multimedia content creation and retrieval system;
Figure 2 shows operations of a multimedia clip editor;
Figure 3 shows operations of a multimedia server;

18

Figure 4 shows operations of a multimedia retrieval client;

Figure 5 shows an illustration of B picture prediction;

Figure 6 shows an illustration of SNR scalability;

Figure 7 shows an illustration of spatial scalability;

5   Figure 8 shows scalable multimedia being used in an IP multicast system;

Figure 9 shows mobile multimedia retrieval system according to the invention;

Figure 10 shows operations of an editor according to the invention;

Figure 11 shows operations of a client according to the invention;

Figure 12 shows safety times of a re-ordered sequence and an original sequence;

10   Figure 13 shows receiving and playback of a re-ordered sequence;

Figure 14 also shows receiving and playback of a re-ordered sequence; and

Figure 15 shows another multimedia content creation and retrieval system.

Figures 1 to 8 have been discussed above.

15

A mobile multimedia retrieval system 10 according to the invention is shown in Figure 9. Although only a single client 22 is shown it will be appreciated that there can be, and in preferred embodiments will be, a number of such clients. It will also be appreciated that at least part of the transmission link connecting a server 18

20   and the client 22 will be wireless.

The system 10 comprises an editor 12 which produces a compressed clip, a server database 14 for storing the compressed clip, re-ordering means 16 for re-ordering the sequence of the compressed clip, a server 18 for sending the re-

25   ordered compressed clip and a client comprising order recovery means 20 to recover the original sequence of the compressed clip. The client 22 controls the operation of the server, for example by specifying which data are sent and how they are sent. Clearly, the re-ordering means 16 and the order recovery means 20 need to be compatible so that the latter can recover the original order. The re-

30   ordering means 16 could be located to operate on data before they reach the server database 14 rather than the embodiment shown in Figure 9. Certain types of data, such as a live stream, may by-pass the database 14 and be sent by the

editor 12 directly to the re-ordering means 16. Although they are shown separately in Figure 9, the editor 12, the server database 14, the re-ordering means 16 and the server 18 can all be configured into a single unit or entity which can also be referred to as a server.

5

Figure 10 shows operation of an editor according to the invention. Raw data captured in the form of one or more uncompressed streams are edited to produce one or more uncompressed tracks. These tracks are compressed in a compression step to produce compressed tracks. The compressed tracks are multiplexed together to produce a compressed multimedia clip. The multimedia clips are coded scalably. The resulting bitstream consists of basic units, such as frames in video compression. These basic units are not all of equal importance; some are primary basic units which are vital to decode the bitstream and some are secondary basic units which improve the quality of the bitstream. Elimination of the secondary basic units causes only a quality loss in the decoded multimedia clip. In effect, the primary basic units are a base layer of the bitstream and the secondary units are enhancement layers.

Instead of organising the basic units into the original transmission order, that is the sequence in which they are produced by editing and compression of raw data, the invented method re-orders their sequence by prioritising the primary basic units so that they pre-empt the secondary basic units in the transmission order. Reordering can take place before or after the multiplexing process depending on the nature of the system and the data. In Figure 10 it is shown as taking place after multiplexing.

25

A re-ordering algorithm is used to re-order the sequence. In a preferred embodiment, the algorithm conducts stream analysis to identify primary and secondary basic units and to collect bit rate statistics. These may include the number of bits per frame. The bitstream is then re-ordered with iterative re-ordering steps to minimise the initial buffering time needed for full-quality playback with full channel throughput and reduced-quality playback with a reduced channel throughput. An example of such a re-ordering algorithm is given below. It should

20

be noted that the expected reduced channel throughput has to be estimated in advance since it is one of the input parameters of the algorithm. The estimation can be based on the statistics obtained from the channel behaviour, for example.

5   Re-ordering of the basic units means that the primary basic units are likely to be received earlier than indicated in their playback time even though some decrease in the channel throughput occurs. However, secondary basic units are vulnerable to transmission delay variations since the method schedules them to be received just before their indicated playback time. In this way the client is still likely to be

10   able to play the primary basic units without pausing the playback, even if the channel throughput decreases considerably. The secondary basic units, on the other hand, may arrive later than their scheduled playback time and will not be used in playback.

15   Figure 11 shows operation of a client according to the invention. The bitstream is received by the client, re-ordered to produce the original compressed clip, demultiplexed to produce the compressed tracks and then decompressed to reconstruct the tracks. The basic unit order recovery step in the client can be applied either before or after demultiplexing (depending in when it occurs in the

20   content editor). In Figure 11 it is shown as occurring before demultiplexing, to correspond to the order described in Figure 10. In this way re-ordering and order recovery are both applied to the multiplexed bitstream. Order recovery organises the basic units back into their natural sequence for decompression and discards all late-arriving secondary basic units.

25

On receipt of a basic unit by the client, it is time-stamped with a time by which it should be played. This time-stamp is compared with the current playback time. If the time-stamp is greater than the current playback time the basic unit is not decompressed and it is discarded. If the time-stamp is less than the current

30   playback time the basic unit is decompressed and the two times are compared after decompression. If the time stamp is less than the current playback time the basic unit is played. Otherwise, it is discarded.

21

In the particular case in which re-ordering is performed after multiplexing, the multiplexing/demultiplexing format used needs to allow re-ordering of the basic units and recovery of the original order.

5

Figure 15 shows another view of a multimedia content creation and retrieval system according to the invention. The system 50 comprises an editor 52, a server 54 and a client 56.

10   The editor comprises a compressor 58 for compressing a raw data stream typically being in the form of a sequence of images into a form suitable for transmission, a multiplexer 60 for multiplexing the compressed raw data stream with other compressed data streams together to produce a compressed bitstream and a layer generation means 62 for producing primary basic frames which are vital to
15   decode the bitstream and secondary basic frames which improve the quality of the bitstream.

The server 54 comprises re-ordering means 64 for arranging the frames in an order which depends on their importance in helping to reconstruct the raw data
20   stream at the client 56 rather than their natural sequential order.

The server 54 and the client 56 each comprise transmitting/receiving means 66 and 70 respectively for data transmission over a transmission link 68 between the server 54 and the client 56.

25

The client 56 comprises order recovery means 72 for putting the frames back into their natural sequential order, a demultiplexer 74 for demultiplexing the bitstream and a decompressor 76 for decompressing the compressed data streams to reproduce the raw data stream. The client comprises playing/output means 78 for
30   playing or otherwise outputting the raw data stream. The client also comprises a controller 80 which applies a control signal to the server 54 to control the re-ordering means in response to receipt of frames in the client 56.

●   ●

22

Example

An embodiment of the invention was tested using an H.263 compliant encoder and a frame re-ordering tool. The encoder was capable of producing B-frames. The re-

5   ordering tool comprised a re-ordering algorithm and could be adjusted to produce frame ordering for different decreased channel data rates.

A standard ITU-T test sequence of video frames called Glasgow was used. The sequence had a QCIF resolution, that is a luminance picture size of 176 x 144

10   pixels and a chrominance picture size of 88 x 72 pixels.

The first 297 frames of the Glasgow sequence were compressed to produce a temporally scalable bitstream comprising INTRA (I) frames, INTER (P) frames and bi-directionally predicted (B) frames. The I and P frames are referred to as primary

15   frames and the B frames are referred to as secondary frames. The frame rate of the original (default) sequence was 12.5 frames per second (fps) and so the compressed sequence corresponded to 23.68 seconds. Each frame was compressed. The first frame was an INTRA frame, and the second one was an INTER frame. After that, there were alternate INTER frames and B-frames. A

20   constant quantizer was used to produce a bitstream having an average bit rate of 41073 bps consisting of an average bit rate for the primary frames of 28984 bps and an average bit rate for the secondary frames of 12089 bps.

For the sake of simplicity, the example does not include multiplexing of the

25   bitstream with another bitstream.

Re-ordering of the frame sequence was optimised separately for bit rates corresponding to sums of the primary frame bit rate (A) and (i) 25%; (ii) 50%; and (iii) 75 % of the secondary frame bit rate (B). It should be noted that 100% of the

30   secondary bit rate (B) corresponds to the average bit rate required in order to obtain full quality playback. The summed bit rates were 32007, 35029 and 38051 bps respectively. For convenience, in the following description, these bit rates are

23

referred to as 25% (A+0.25B), 50% (A+0.5B) and 75% (A+0.75B), and the corresponding re-ordered sequences are referred to as 25-ordered, 50-ordered and 75-ordered. It was expected that the full rate of the channel would be the average bit rate of the sequence.

5

The reordering algorithm used two values:

FQFR (full quality full rate), which is the minimum initial buffering time to ensure full-quality playback assuming a full rate channel; and

RQRR (reduced quality reduced rate) which is the minimum initial buffering time to
10   ensure reduced-quality playback in which the primary frames are played and some or all secondary frames may not be played (assuming a reduced secondary bit rate of 25%, 50% or 75%).

In calculating FQFR and RQRR for a particular channel, the algorithm assumes
15   that it has a constant bit rate. Using the bit rate statistics the likely number of bits per frame is calculated. The time instant at which a particular frame is to be played is known from the time stamp. A time is determined by which a frame will be ready for display as a picture (allowing, of course, for the time needed to receive the bits for a frame and to prepare them) and this time is compared with the time stamp of
20   the frame. If the frame will be received after it is to be displayed, the buffering time is increased, if it is received in time then the next frame can be dealt with. Once the algorithm has compared the likely times of receipt of all of the frames against their playback times and adjusted to buffering time accordingly so that they should all be received in time, the minimum buffering time has been calculated.

25

The algorithm was applied to a sequence having its original order. In this case, FQFR is smaller than RQRR because in order to obtain full quality playback, you have to wait longer in starting playback if you have a reduced rate channel. The algorithm seeks to minimise the initial buffering time needed for full-quality
30   playback with full channel throughput and at the same time for reduced-quality playback with a reduced channel throughput. In other words, the algorithm seeks to find a value where FQFR and RQRR are approximately equal. It should be

24

noted that the algorithm is not optimal, that is the algorithm does not necessarily re-order the sequence so that the minimum initial buffering delay is found. The algorithm consists of the following steps:

1. Calculate FQFR and RQRR.

5   2. If FQFR is greater than or equal to RQRR, stop re-ordering. The minimum initial buffering delay is the greater of FQFR or RQRR. Otherwise, continue with the next step.

3. Shift all primary frames towards the beginning of the sequence by one frame step. For example, if the initial sequence is:

10   I0, P1, P2, B3, P4, B5, P6, B7, P8, B9, P10, ...,

shifting changes the sequence to:

I0, P1, P2, P4, B3, P6, B5, P8, B7, P10, B9, ...

where I0 is the first frame. It can be seen that where a secondary frame is earlier in sequence than an adjacent primary frame, the positions of the primary and

15   secondary frames are exchanged.

4. Continue from step 1.

The buffering time needed to ensure pause-less playback in the reduced bit rate channel is greater for the original sequence than for the re-ordered sequence. It is desirable to have a short initial buffering time. The re-ordering process makes a

20   trade-off between the minimum buffering time needed for a full-rate channel and the minimum buffering time needed for expected reduced-rate channels. Without re-ordering, less initial buffering time would have been needed to provide full-quality playback in the full-rate channel. However, without re-ordering, more initial buffering time would have been required to provide reduced-quality playback in the

25   reduced-rate channel.

In the example, safety times were also investigated. Initial buffering time was set to be the minimum for reduced quality playback of the re-ordered sequence at 25% secondary bit rate. Figure 12 shows how safety time varies with playback of

30   the 25-ordered sequence and the original order sequence. It shows that throughout playback, the 25-ordered sequence (represented by the upper line) has a longer safety time than the original order sequence.

Results were also obtained for the 50% and 75% secondary bit rates. The average safety times (in seconds) for all primary frames in a sequence are shown in the following table for all three reduced bit rates. The safety times are characterised by minimum safety time and average safety time.

		25%	50%	75%
Minimum	Re-ordered	4.79	2.51	1.06
	Default	3.46	1.63	0.64
	Difference	1.33	0.88	0.42
Average	Re-ordered	5.90	3.51	2.12
	Default	4.66	2.83	1.84
	Difference	1.24	0.67	0.28

It can be seen that both the minimum and average safety times of the re-ordered sequences are longer than those of the original sequence.

In contrast, set out below is a table showing the required buffering delays in seconds for full-quality playback at different average bit rates. This is to minimise pauses in playback.

	25%	50%	75%
Re-ordered	10.04	6.03	3.53
Default	7.02	4.64	3.02

It can be seen that the re-ordered sequence needs a longer buffering delay for full-quality playback because the secondary frames are transmitted out of their natural order and time is required to put all the frames back into their natural order. However, this is not important because the invention sets out to provide reduced quality playback with minimal initial buffering delay. To illustrate this, the following

table shows the buffering delays required to ensure pause-less reduced quality playback:

	25%	50%	75%
Re-ordered	5.28	3.49	2.47
Default	6.91	4.46	2.84

These results show that where the bit rate of the transmission channel is reduced,
5   the invented method requires a shorter buffering delay before playback can be started.

The effect of the invention is illustrated in Figure 13 which shows playback of the 25-ordered sequence at 25% bit rate (that is A+0.25B as discussed above).
10   Playback times, that is the times at which the frames are intended or supposed to be played to a viewer, are represented as a straight line. To be played in sequence, without requiring pauses, each frame must be received before its playback time. Any symbol located below the playback time line represents a frame which is received before its scheduled playback time and any symbol
15   located above the playback time line represents a frame which is received after its scheduled playback time. In the example of Figure 13, the primary frames were all received in time to be played and the secondary frames were all received too late. Therefore the secondary frames were all discarded without being played.

20   It should be understood that if the sequence had not been re-ordered, there is a likelihood that some of the primary frames would have arrived after their playback times and so would have required playback to be paused (since a primary frame cannot be discarded without also discarding all of the frames predicted from it).

25   Figure 14 shows how the 25-ordered sequence is received and played when the channel throughput is not reduced. It can be seen that all frames are received in time to be played. Again, the upper line represents when secondary frames are received and the lower line represents when primary frames are received.

27

Of course, the exact appearance of Figures 13 and 14 depends on the nature of the original sequence, as well as the bit rate and the re-ordering that is performed. Differences can be expected in other systems which re-order data in different

5   ways.

In use, the invention can be applied on-line to prepare a bitstream for transmission at some future point. For example, assuming that there may be considerable variation in the available bandwidth of a given transmission channel, the algorithm

10   may be applied to a bitstream and re-ordered sequences may be calculated for several alternative bandwidths, such as 25%, 50% and 75%. In transmission, if problems are encountered, for example with pausing, the re-ordered sequence currently being used may be changed to one better suited to a lower available bandwidth. Equally, if transmission is proceeding better than expected, a

15   sequence better suited for a higher bandwidth may be used. The invention may check the progress of transmission and/or playback a number of times during transmission and adjust the sequence accordingly. It is advantageous if this adjustment can be programmed dynamically whilst transmission is occurring. In this way, intermittent problems can de dealt with.

20

The part of the invention which re-orders a bitstream is located in an editor or in a server. The part of the invention which recovers the order is located in a client.

A further improvement is provided if the proportion of bits belonging to the primary

25   frames is reduced by replacing some of the primary frames with B-frames. This reduces the compression efficiency slightly because B-frames are predicted from reference frames (P-frames) which are further away in time and so the B-frames and P-frames are less alike. This yields a poorer predicted B-frame and so more bits must be used to code the corresponding prediction error image. Since in this

30   arrangement there are now more bits belonging to secondary frames which can be discarded, re-ordering the frames can provide even better protection against transmission delays and pauses.

28

One way of looking at the invention is to say that it sacrifices the safety times of the secondary frames in order to maintain maximum safety times for the primary frames.

5

The invention is particularly suitable for streaming-type multimedia retrieval.

While preferred embodiments of the invention have been shown and described, it will be understood that such embodiments are described by way of example only.

10 For example, although the invention has been described applied to a temporally scalable bitstream, it can also be applied to other types of scalability, including spatial, spectral and SNR. Numerous variations, changes and substitutions will occur to those skilled in the art without departing from the scope of the present invention. Accordingly, it is intended that the following claims cover all such

15 variations as fall within the spirit and scope of the invention.

Claims

1. A server for transmitting a data signal having a sequence of data units in a predetermined order over a transmission link the data units being sent in an order determined by their relative importance rather than their predetermined
5   order.

2. A server according to claim 1 in which the data units represent a base layer and at least one enhancement layer.

10 3. A server according to claim 2 comprising re-ordering means to change the order of the data units.

4. A server according to any preceding claim in which the data signal is scalable.

15 5. A server according to claim 4 in which the signal is scalable in a domain selected from a group consisting of the temporal, the spatial, the spectral and the SNR domains.

6. A server according to any preceding claim which comprises an editor for
20   providing the data signal.

7. A server according to any preceding claim in which the data signal represents a sequence of pictures to produce a moving image.

25 8. A server according to claim 7 in which the data signal represents a video sequence.

9. A server according to any preceding claim in which the data signal comprises multimedia data.

30

10. A data transmission system for transmitting a data signal having a sequence of data units in a predetermined order over a transmission link between a data

source and a data sink the data units being sent in an order determined by their relative importance rather than their predetermined order.
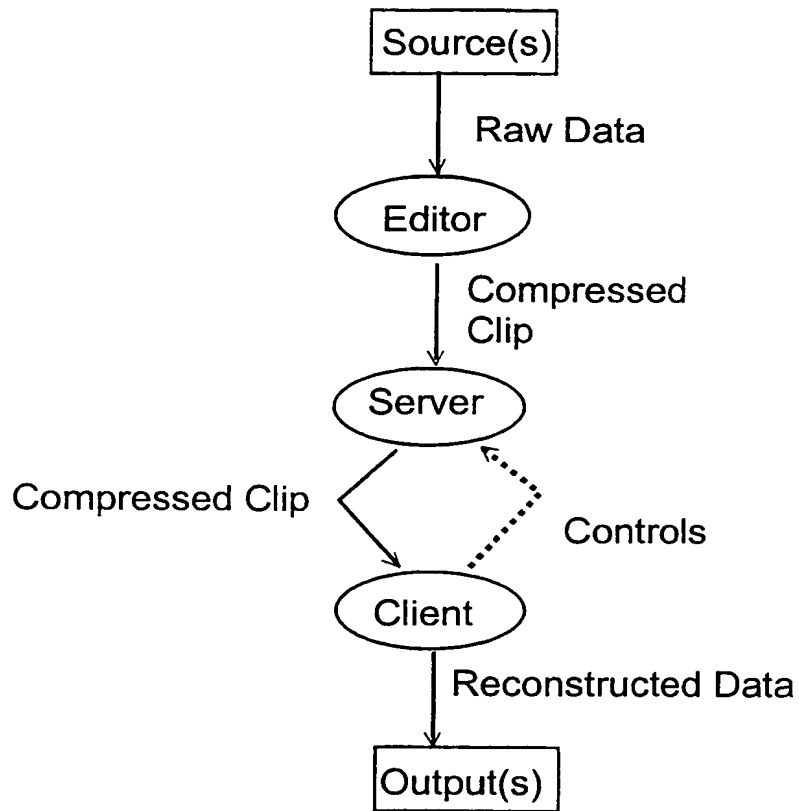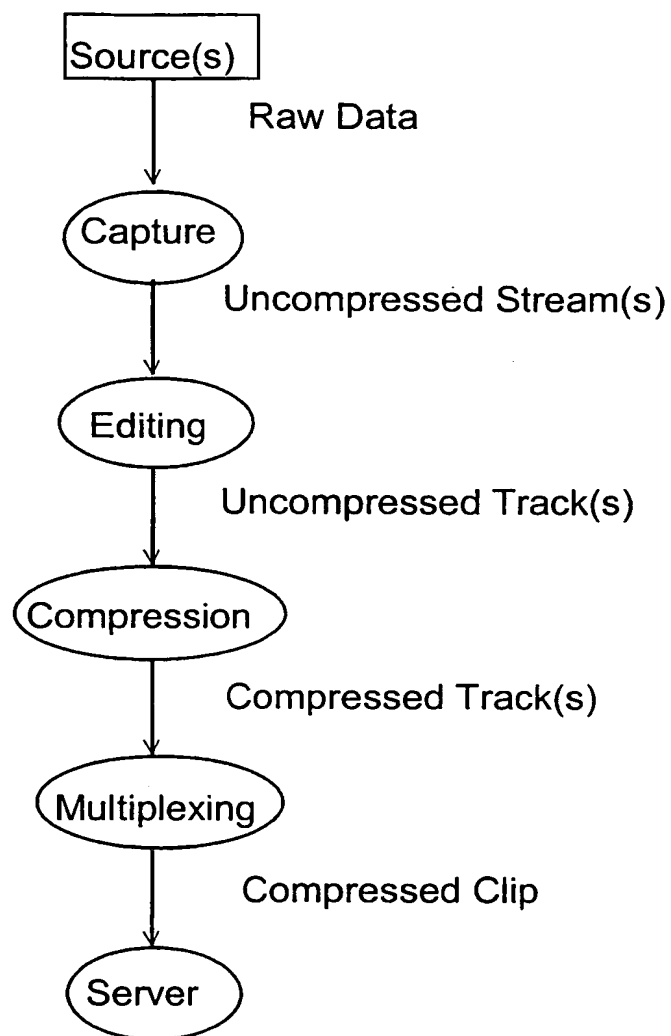
11. A transmission system according to claim 10 in which the data units each comprise a base layer and at least one enhancement layer and when re-ordered the base layer of a particular data unit has a greater safety time than of the or each enhancement layer of the particular data unit.

12. A transmission system according to claim 10 or claim 11 in which the source is a server.

13. A transmission system according to any of claims 10 to 12 in which the source is an editor.

14. A transmission system according to any of claims 10 to 13 in which the sink is a client.

15. A transmission system according to any of claims 10 to 14 in which the sink is a mobile terminal.

16. A transmission system according to claims 10 to 15 in which the sink is a mobile telephone.

17. A transmission system according to claims 10 to 16 in which means are provided to check the progress of transmission and to change the order being used to one better suited to available bandwidth.

18. A method of transmitting a data signal having a sequence of data units in a predetermined order over a transmission link between a data source and a data sink comprising the step of sending the data units in an order determined by their relative importance rather than their predetermined order.

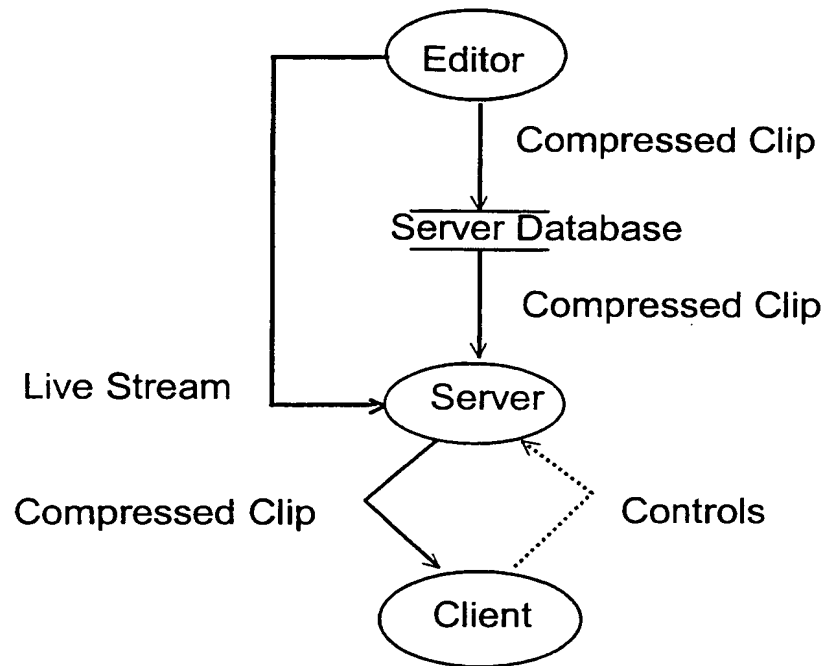19. A method according to claim 18 in which the data units are returned to their original sequence once they have been transmitted over the transmission link.

20. A method according to claim 18 or claim 19 in which the progress of transmission is checked and the order being used is changed to one better suited to available bandwidth.

21. A computer program product stored on a computer usable medium comprising computer readable program means for causing transmission of a data signal having a sequence of data units in a predetermined order over a transmission link the data units being sent in an order determined by their relative importance rather than their predetermined order.

22. A computer program product according to claim 21 comprising a server.

23. A computer program product according to claim 21 or claim 22 comprising an editor for providing a scalable data signal.

24. A computer program product according to any of claims 22 to 23 comprising re-ordering means for providing the layers of the or each data units with different safety times.

25. A data signal having a sequence of data units for transmission over a transmission link between a data source and a data sink the data units being in an order determined by their relative importance rather than their predetermined order.

●   ●

Fig. 1

Fig. 2

3/13

Fig. 3

4/13

Fig. 4

Fig. 5

Fig. 6

Enhancement
Layer

EI　　　　　EP　　　　　EP

Base
Layer

I　　　　　P　　　　　P

Fig. 7

S — 120 kbit/s — R1

R1 — R2 — 120 kbit/s — C1

R1 — 60 kbit/s — R3

R3 — 60 kbit/s — C2

R3 — 28 kbit/s — C3

Fig. 8

Fig. 9

```
        ┌──────────┐
        │ Source(s │
        └──────────┘
              │
              │ Raw Data
              ▼
          ╭─────────╮
          │ Capture │
          ╰─────────╯
              │
              │ Uncompressed Stream(s)
              ▼
          ╭─────────╮
          │ Editing │
          ╰─────────╯
              │
              │ Uncompressed Track(s)
              ▼
        ╭─────────────╮
        │ Compression │
        ╰─────────────╯
              │
              │ Compressed Track(s)
              ▼
        ╭──────────────╮
        │ Multiplexing │
        ╰──────────────╯
              │
              │ Compressed Clip
              ▼
        ╭────────────╮
        │ Reordering │
        ╰────────────╯
              │
              │ Compressed Clip
              ▼
          ╭────────╮
          │ Server │
          ╰────────╯
```
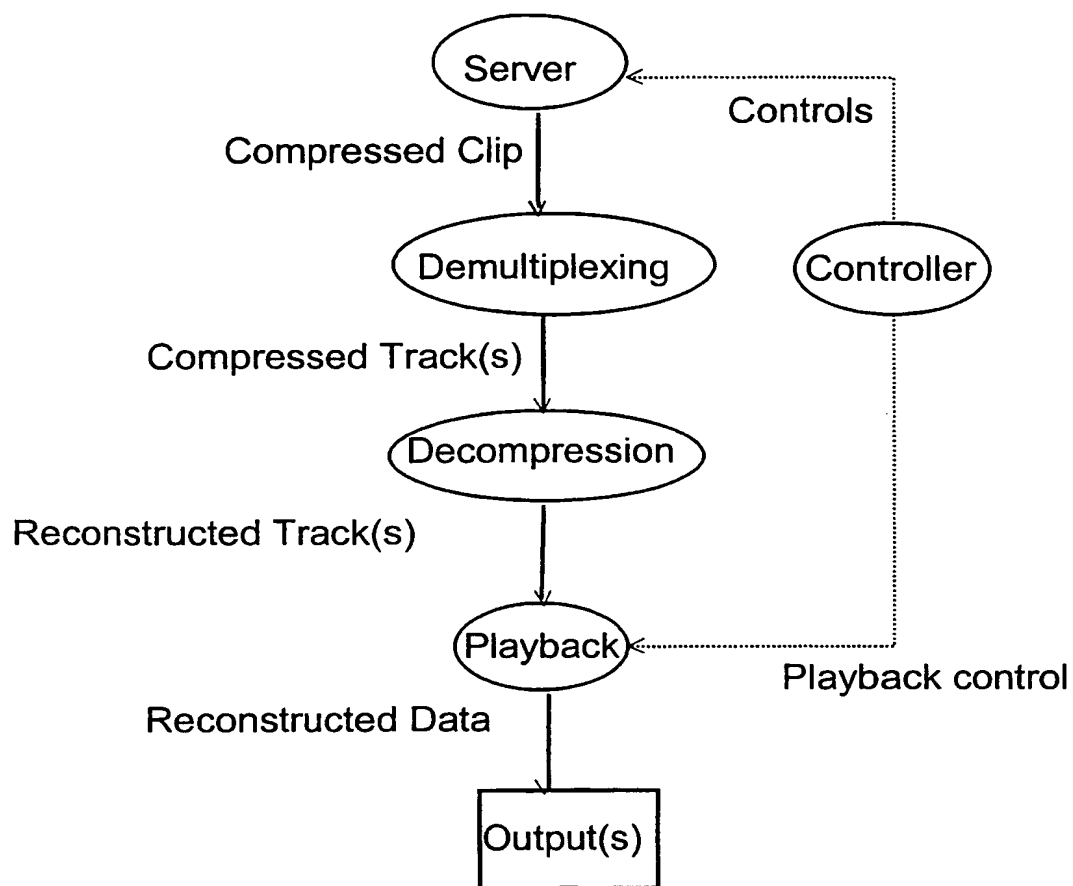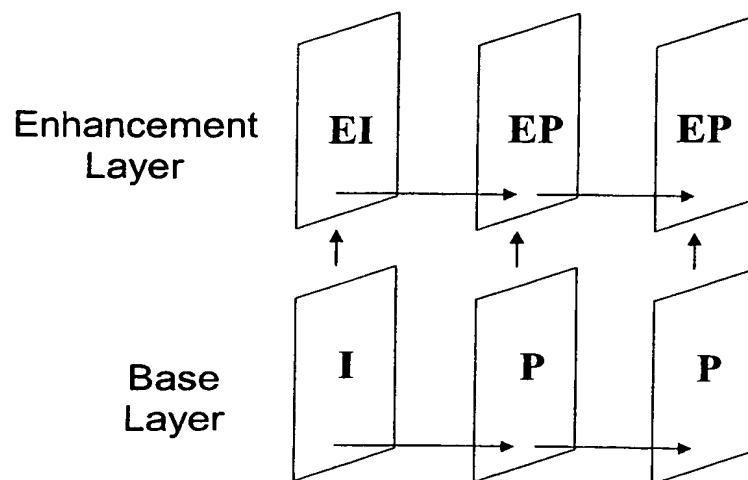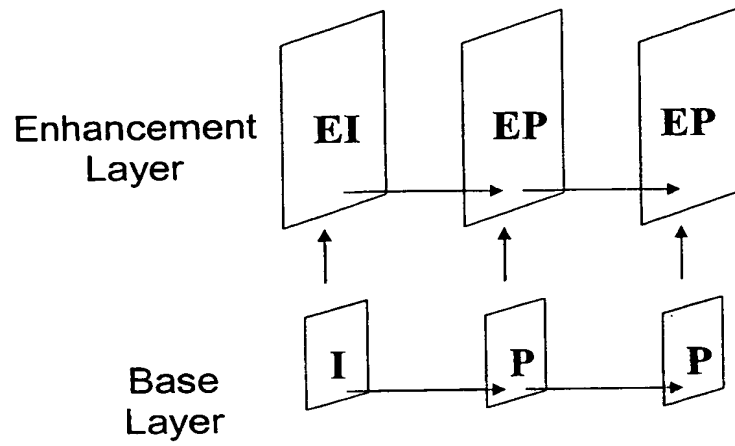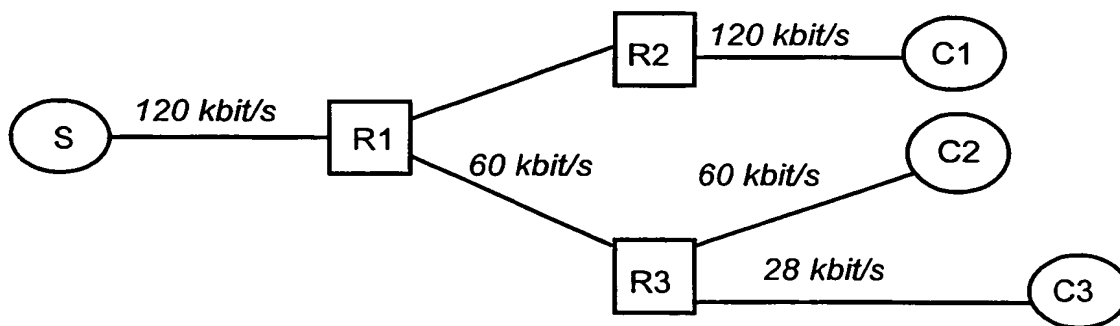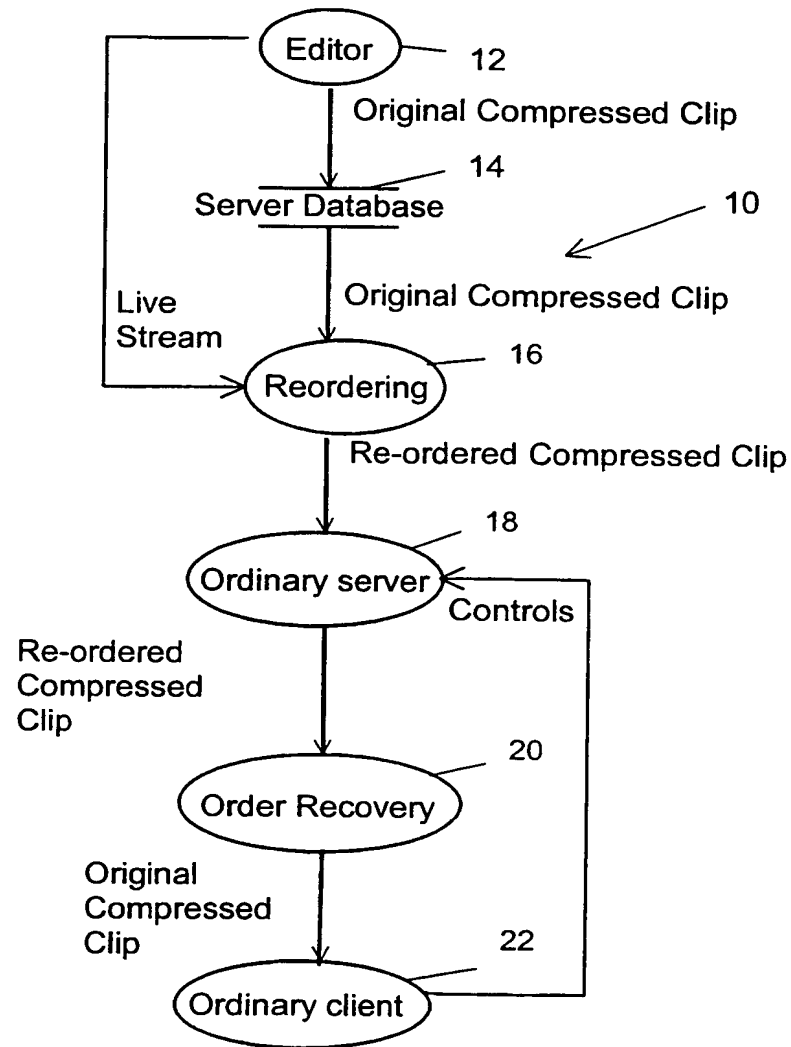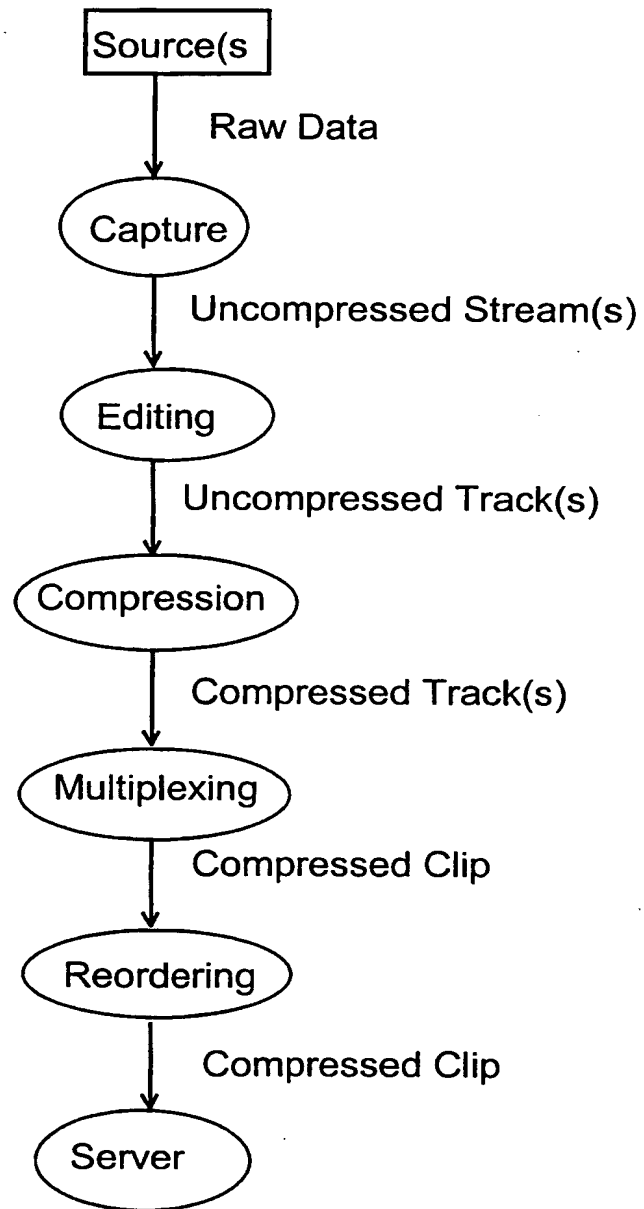
Fig. 10
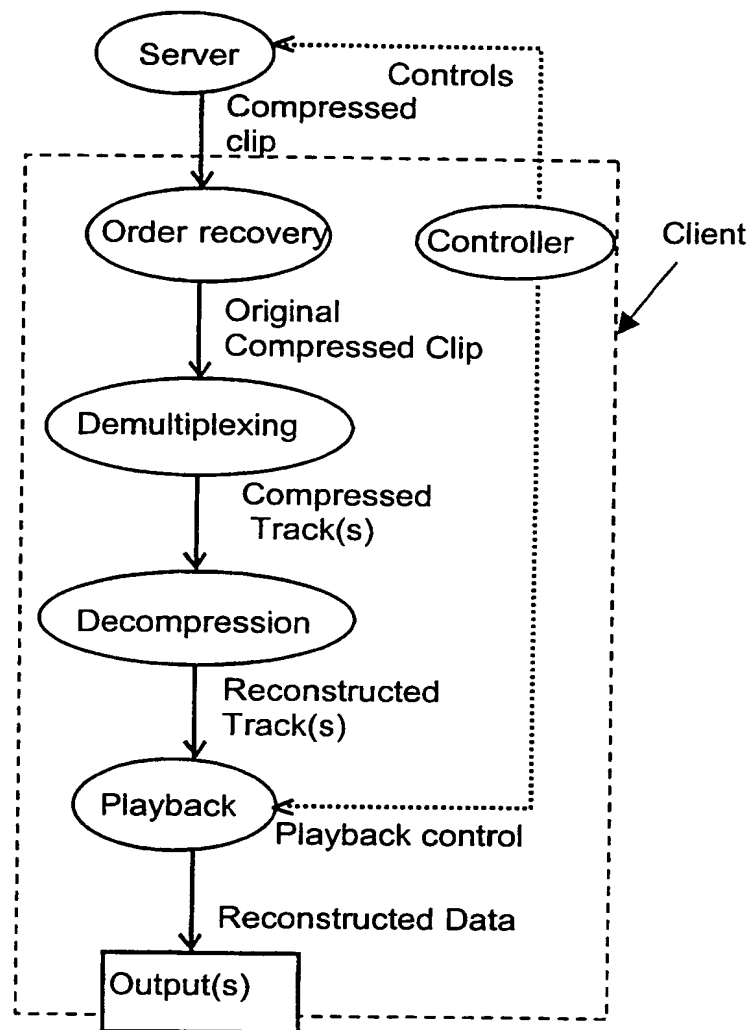
Fig. 11
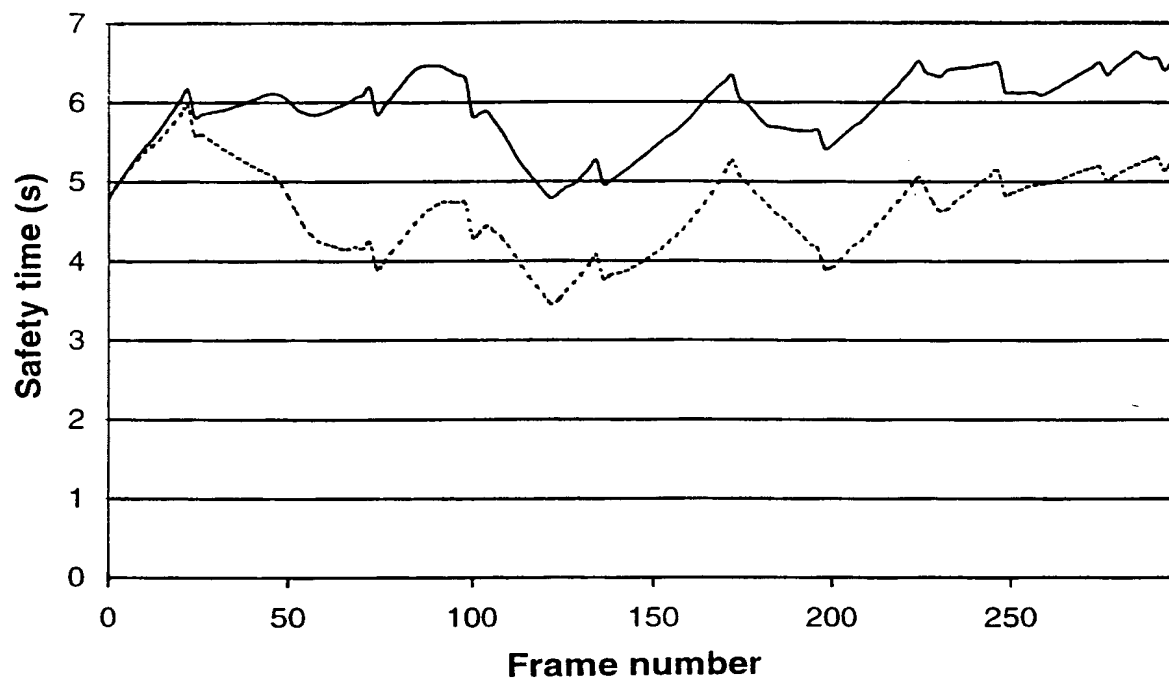
Fig. 12
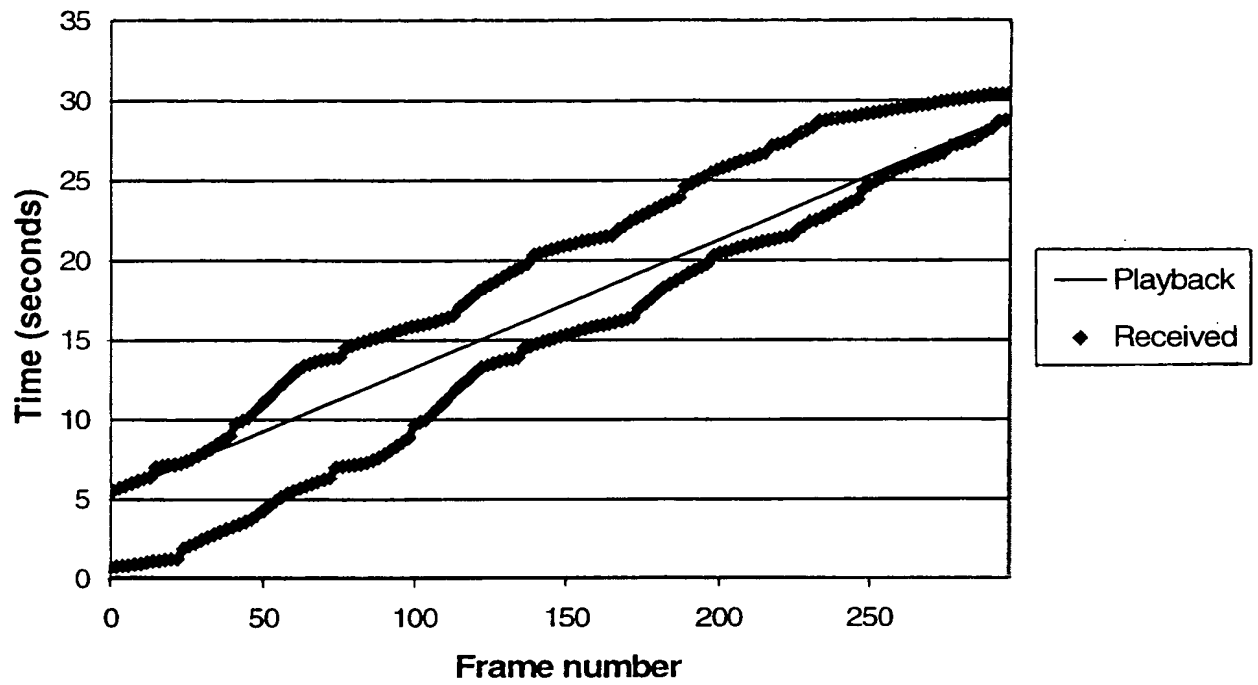
Fig. 13
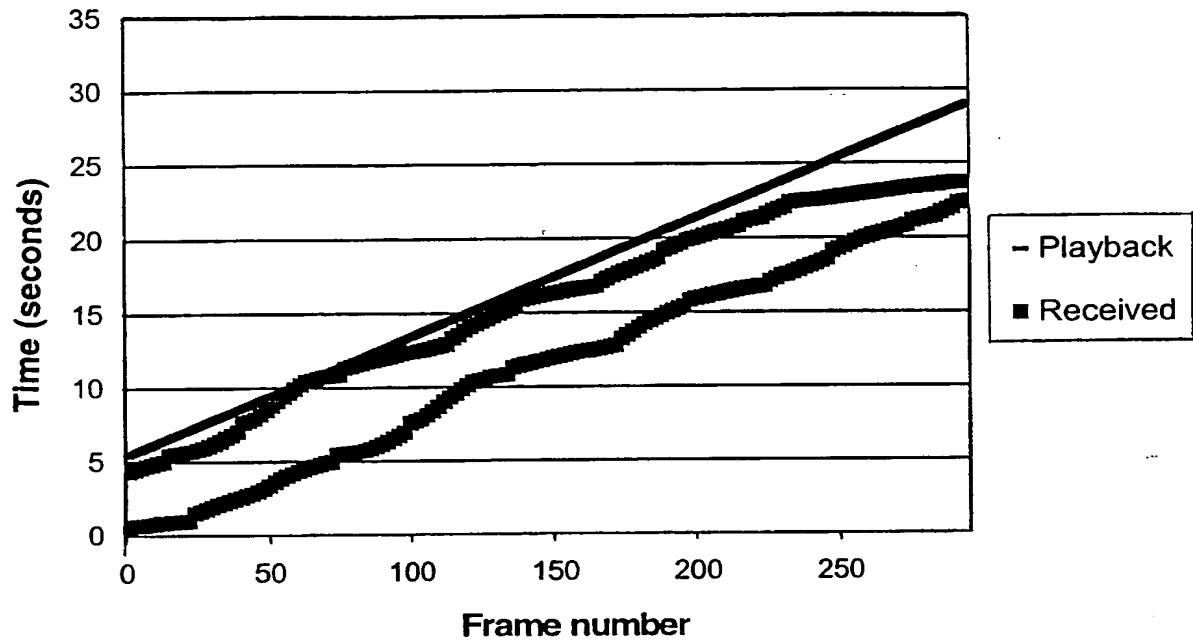
Fig. 14
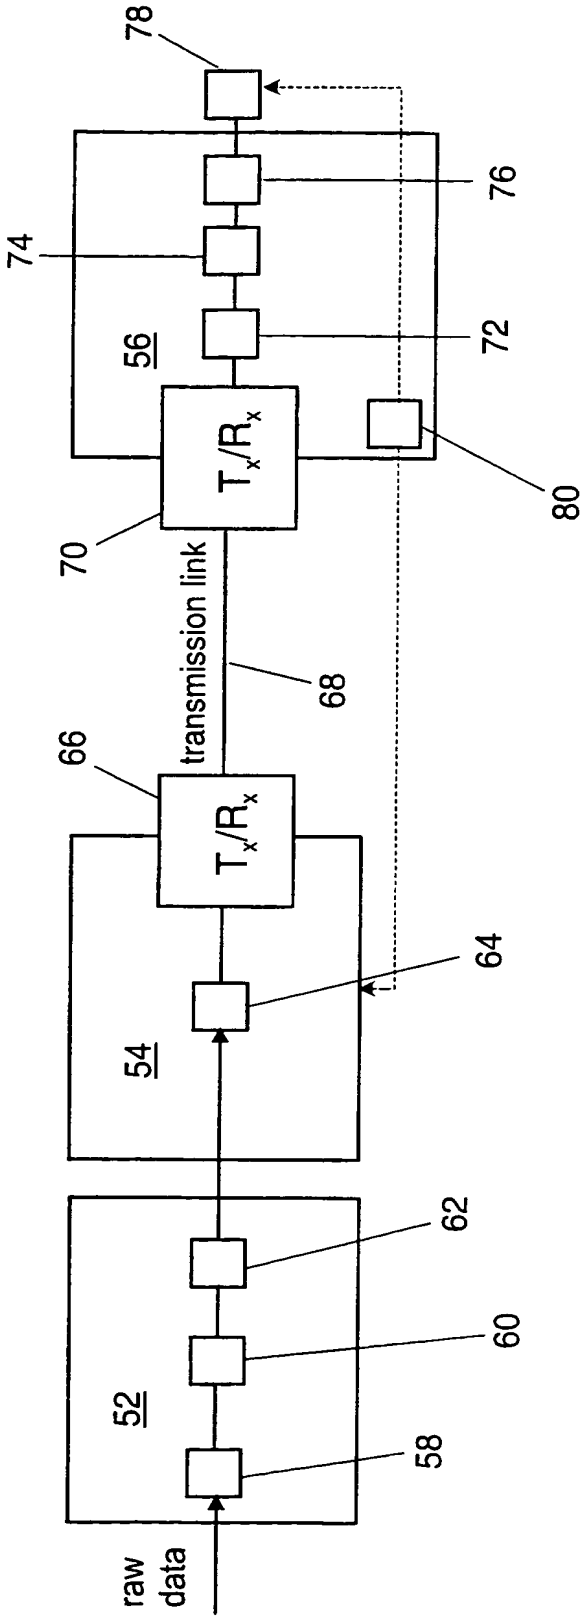
Fig. 15

INTERNATIONAL SEARCH REPORT

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7   H04N5/00   H04N7/26

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7   H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, PAJ, EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category°	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 018, no. 566 (E-1622), 28 October 1994 (1994-10-28) & JP 06 205384 A (NEC CORP), 22 July 1994 (1994-07-22) abstract	1,6-10, 12-23,25
Y		2-5,11, 24

Y	US 5 564 001 A (LEWIS SCOTT W) 8 October 1996 (1996-10-08) column 2, line 58 -column 3, line 30 column 4, line 58 - line 65 column 7, line 4 - line 14 column 7, line 43 - line 47 abstract	2-5,11, 24
A		1,6-10, 12-23,25
	--- -/--	

[X] Further documents are listed in the continuation of box C.   [X] Patent family members are listed in annex.

Date of the actual completion of the international search	Date of mailing of the international search report
9 August 2000	- 9. 10. 2000
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer Jesper Bergstrand

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 634 871 A (AT & T CORP) 18 January 1995 (1995-01-18) the whole document	1-25

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
JP 06205384	A	22-07-1994	JP	2833950 B	09-12-1998
US 5564001	A	08-10-1996	US	5325423 A	28-06-1994
			AU	693426 B	02-07-1998
			AU	5605394 A	08-06-1994
			AU	8787298 A	03-12-1998
			BR	9307442 A	01-06-1999
			CA	2148090 A	26-05-1994
			EP	0746937 A	11-12-1996
			JP	8503585 T	16-04-1996
			NZ	258406 A	24-11-1997
			RU	2110162 C	27-04-1998
			WO	9411981 A	26-05-1994
EP 0634871	A	18-01-1995	CA	2126467 A	14-01-1995
			JP	7170514 A	04-07-1995
			US	5742343 A	21-04-1998

THIS PAGE BLANK (USPTO)